


# Pipe & Drape Assembly Instructions

## Color Coding System

**STEP**  
**5**


### Center Crossbar Connector Pole

**Note:** Place drapes on crossbar first prior to assembling. Place 3 drapes on crossbar for single assembly (shown here). For double assembly use 6 drapes.

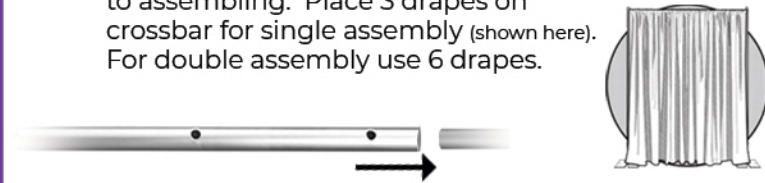


**STEP**  
**4**

### Crossbar To Upright Pole

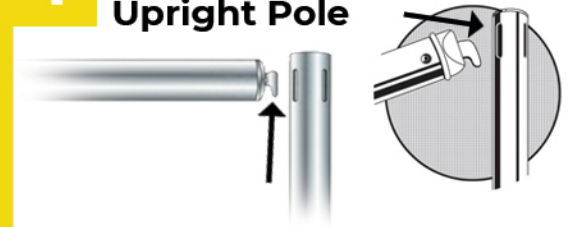

**STEP**  
**3**

### Top Upright Extender Pole




**STEP**  
**2**

### Bottom Upright Pole



**STEP**  
**1**

### Base & Pin

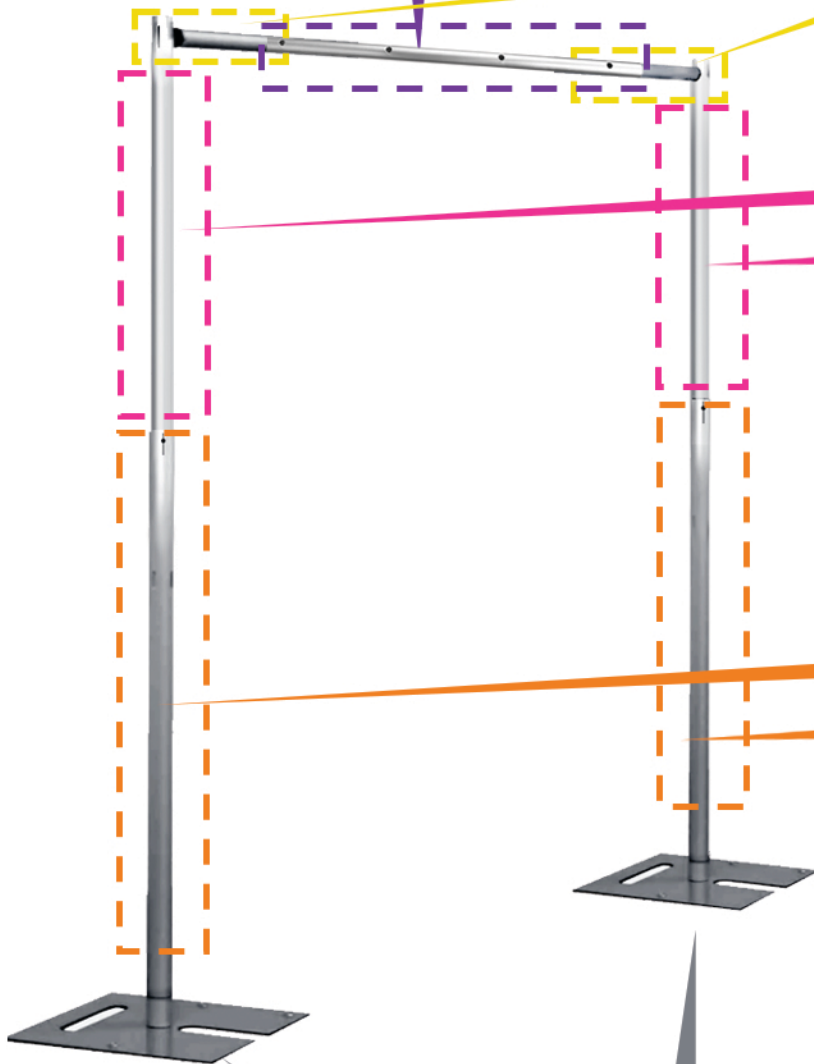

# Detailed Pipe & Drape Assembly Instructions

## For 8ft-10ft Single Booth

### Parts List:

Base (2)

Base Pin (2)

Bottom Upright Pole (2) **Orange**

Top Upright Extender Pole (2) **Pink**

Crossbar to Upright Pole (2) **Yellow**

Center Crossbar Connector Pole (1) **Purple**

Drape Panels (3-6)

### Step By Step Instructions

**Step 1)** Screw the *Base Pin* onto the *Base* (the *Base Pin* goes on the raised portion).

**Step 2)** The *Bottom Upright Pole* (**Orange**) slides over the top of the *Base Pin*.

**Step 3)** The *Top Upright Extender Pole* (**Pink**) slides on to *Bottom Upright Pole* (**Orange**). Make sure the *Top Upright Extender Pole* has the slots needed to support the horizontal poles.

**Step 4)** Repeat the first 3 steps to create another 8ft vertical upright.

**Step 5)** The *Crossbar to Upright Pole* (**Yellow**) will be placed horizontally and hooks into the slots at the top of your newly constructed 8 ft pole. Insert the hook into the *Top Upright Extender Pole* (**Pink**). Repeat for other 8ft pipe construction created.

**Step 6)** Place 3 drapes on the *Center Crossbar Connector Pole* (**Purple**). It is the pipe that will run horizontally to complete the construction of the unit. It has 4 holes that will be used in the next step. Be sure the seams on the drape pockets are facing the back of the pole in the same direction. It is very important that the drapes are placed on the *Center Crossbar Connector Pole* prior to connecting them in the next step.

**Step 7)** The *Center Crossbar Connector Pole* (**Purple**) can now connect to the *Crossbar to Upright Pole* (**Yellow**). Connecting the first set of holes on either end will result in 10 ft. pole. Connecting to the second set of holes will result in an 8 ft. pole.

**Step 8)** Arrange *Drape Panels* evenly across each horizontal pipe to create a full look.